



MG

HG
Coating

3

Specialty

- *Can mill HRC62 hardened material;
- *The latest high-hardness,high-temperature resistant coating.

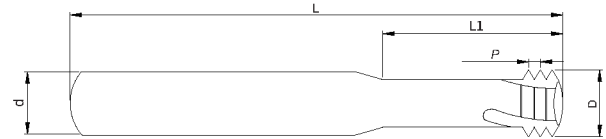

The shank taper angle shown is not an exact value and to avoid contact with the workpiece, we recommend the user controls the precise value of this angle. Shank taper angle should not make contact with the workpiece.

HRC65 three-teeth thread milling cutter (metric)

Model Number	P Tooth Pitch	D Diameter of Cut	L1 Effective Length	d Shank Diameter	L Overall Length	T Number Of Flutes	Type	In Stock
HRC65 Three-teeth Thread Cutter M1.2*0.25	0.25	D0.92	2.4	4	50	3	3 Teeth	○
HRC65 Three-teeth Thread Cutter M1.4*0.3	0.3	D1.05	3	4	50	3	3 Teeth	○
HRC65 Three-teeth Thread Cutter M1.6*0.35	0.35	D1.22	3.2	4	50	3	3 Teeth	○
HRC65 Three-teeth Thread Cutter M2.0*0.4	0.4	D1.55	4	4	50	3	3 Teeth	○
HRC65 Three-teeth Thread Cutter M2.5*0.45	0.45	D1.96	5.5	4	50	3	3 Teeth	○
HRC65 Three-teeth Thread Cutter M3*0.5	0.5	D2.4	6	4	50	3	3 Teeth	○
HRC65 Three-teeth Thread Cutter M4*0.7	0.7	D3.15	8	4	50	3	3 Teeth	○
HRC65 Three-teeth Thread Cutter M4.5*0.75	0.75	D3.5	11	4	50	3	3 Teeth	○
HRC65 Three-teeth Thread Cutter M5*0.8	0.8	D3.95	10	4	50	3	3 Teeth	○
HRC65 Three-teeth Thread Cutter M6*1.0	1	D4.8	13	6	50	3	3 Teeth	○
HRC65 Three-teeth Thread Cutter M8*1.25	1.25	D6.5	16	8	60	3	3 Teeth	○
HRC65 Three-teeth Thread Cutter M10*1.5	1.5	D7.9	20	8	60	3	3 Teeth	○

○ Standard in stock

*Contact customer service to confirm and place an order